[V7] FAQ: How to un-delete backup data that were moved to retention unintentionally

Article ID: 5324

Reviewed: 2021-07-28

Product Version:

AhsayCBS: 7.3.0.0 - 8.1.1.50

OS: All platforms

ATTENTION 1st January, 2022: v7 officially End-of-Life [details]

Description

For backup data that are moved to retention unintentionally (e.g. backup source location (e.g. hard drive / USB drive) disconnected before a sub-sequence backup):

No.	Туре	Timestamp	Log
*			
*	warn	YYYY/MM/DD hh:mm:ss	Backup source "%backup_source%" does not exist!
*			

Since the AhsayOBM / ACB backup client cannot detect the backup source location, all backup data are detected as deleted data by the AhsayOBM / ACB backup client.

This document contains instruction on how to rollback such action (e.g. un-delete the data), so that the data do not need to be re-uploaded after the backup source drive is reconnected.

Steps

The following assumptions are made:

- Previous backup was performed on March 20, 2018 01:00:00.
- The backup source drive was disconnected before the sub-sequence backup, performed on March 21, 2018 03:00:00.
- Data backup by the previous job to backup destination AhsayCBS were detect and retain as deleted data.
- You want to revert the data snapshot the previous backup on March 20, 2018 01:00:00.

Important:

It is recommended to temporarily suspend the backup user to ensure that no backup / restore job is performed during the undelete process.

Refer to the following steps to un-delete the data:

- 1. On the AhsayCBS web console, obtain the backup set ID of the affected backup set:
 - Under Backup / Restore, select Users, Groups & Policies.

- Select **Backup User**, and the corresponding backup user, then **Backup Set**.
- Select the affected backup set under Manage Backup Set, the backup set ID is listed under General




2. From the backup destination (e.g. AhsayCBS), browse to the **blocks** folder where the backup data are stored at:

%backup destination%\%backupset id%\blocks

For example

For backup destination set to AhsayCBS

C:\UserHome\Username\1517279516004\blocks

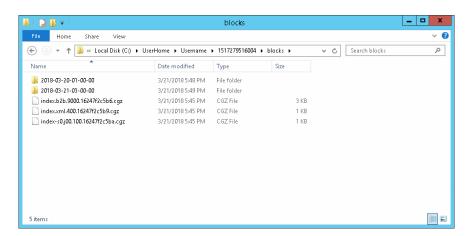


Note:

A separate folder is created for each backup job according to its start time (YYYY-MM-DD-hh-mm-ss), under the **blocks** folder. All files backed up by that job are stored in that particular folder.

- 3. Remove (or move to another location) all index files in the **blocks** folder:
 - %backup destination%\%backupset id%\blocks\index.b2b.*.cgz
 - %backup_destination%\%backupset_id%\blocks\index.xml.*.cgz
 - %backup destination%\%backupset id%\blocks\index-s0*.cgz

https://wiki.ahsay.com/ Printed on 2024/04/24 08:46

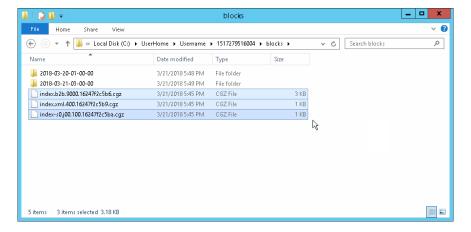

4. Copy the index files from a previous backup job folder (the backup snapshot (YYYY-MM-DD-hh-mm-ss) which you would like to revert to), back to the **blocks** folder.

For example

To revert the backup snapshot to the backup on March 20, 2018 01:00:00, browse to

C:\UserHome\Username\1517279516004\blocks\2018-03-20-01-00-00

Copy

То

 $C:\UserHome\Username\1517279516004\blocks\index.b2b.*.cgz \\ C:\UserHome\Username\1517279516004\blocks\index.xml.*.cgz \\ C:\UserHome\Username\1517279516004\blocks\index.s0*.cgz \\ C:\Userhome\1517279516004\blocks\index.s0*.cgz \\ C:\Userhome\1517279516004\blocks\index.s0$



Important:

Once the backup snapshot is reverted, data backup by the latest backup (or sub-sequence backup after the snapshot which you have reverted to) will not be displayed in the restore menu.

5. Ensure that the issue to the backup source drive is resolved, then perform another backup job afterward.

Keywords

snapshot, undelete, undeleting, revert, disconnect

 $public: 5324_how_to_undelete_backup_data~https://wiki.ahsay.com/doku.php?id=public: 5324_how_to_undelete_backup_data~https://wiki.ahsay.com/doku.php.$

From:

https://wiki.ahsay.com/ - Ahsay Wiki

Permanent link:

https://wiki.ahsay.com/doku.php?id=public:5324_how_to_undelete_backup_data

Last update: 2021/12/16 06:48



https://wiki.ahsay.com/ Printed on 2024/04/24 08:46